

Below-ground Pools



Section [30-796](#) (e)(4) outlines fencing requirements for pools

Below-ground Pools

- All below-ground pools require a building permit (permit [link](#))
- The pool edges shall be setback eight (8) feet from side and rear property lines. The front setback must meet the required front yard setback for the zoning district in which it is located.
- All gates shall be equipped with self-closing and self-latching devices placed at the top of the gate or otherwise inaccessible to small children and provided with hardware for permanent locking devices
- The pool shall be, when not supervised, enclosed with a fence (*see Image 2*) or covered with an automatic pool cover, meeting the standards of F1346-91 (reapproved 1996) of American Society of Testing and Materials (ASTM)
- Fencing and/or automatic pool covers shall be installed prior to filling the pool



Image 1

Fencing Requirements

- Fencing shall be chain link, vertical pickets, or solid
- Fencing shall be a minimum of four (4) feet in height
- Spaces between the bottom of the fence and the ground or between the pickets shall not exceed four (4) inches

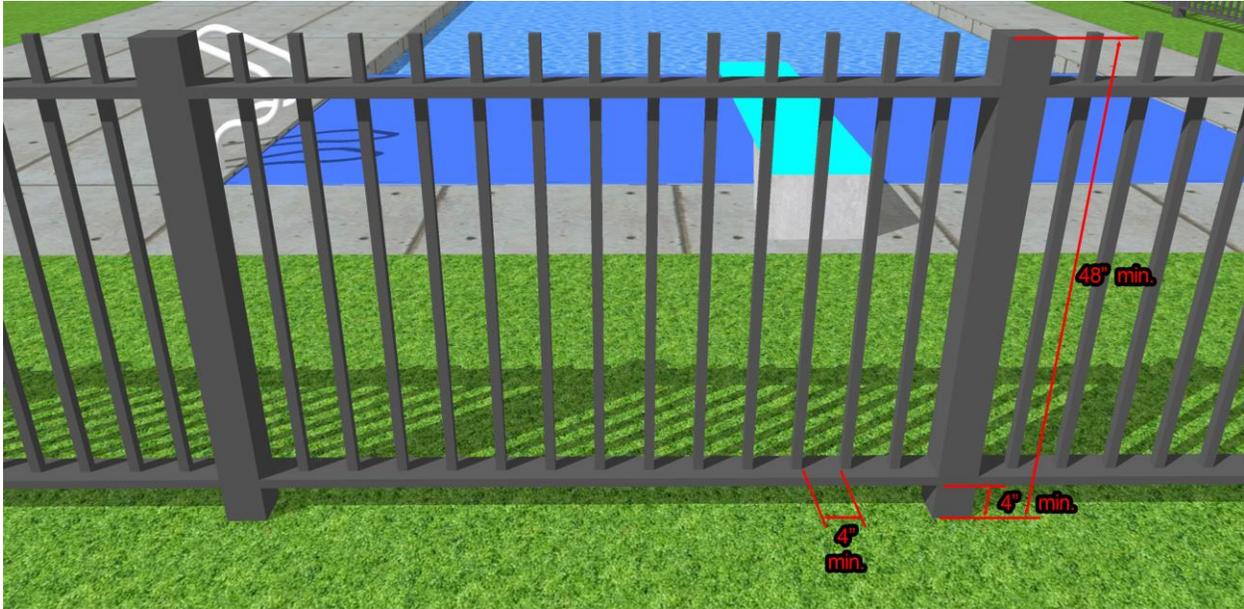


Image 2