



Justin Femrite, PE  
Public Works Director  
13065 Orono Parkway  
(763) 635-1000

**Construction Includes:**

- Spot Pavement Patch
- Mill & Overlay Pavement
  - See Figure on back.

**Construction Schedule:**

- Begin May 15, 2023.
- Anticipated Completion: Middle of June, 2023.

**Contractor:**

**North Valley, Inc.**  
20015 Iguana St. NW  
Suite #100  
Nowthen, MN 55330  
Phone: 763-274-2580

**Engineer:**

**Jason W Cook, P.E.**  
Project Manager  
Cell: 763-200-2444  
[Jason.Cook@bolton-menk.com](mailto:Jason.Cook@bolton-menk.com)

**Inspector:**

**Jon Nico, E.I.T.**  
Bolton & Menk, Inc.  
Cell: 952-324-0310  
[Jon.Nico@bolton-menk.com](mailto:Jon.Nico@bolton-menk.com)

**Project Updates:**

The City website will post project updates at the following location:  
<https://www.elkrivernm.gov/1556/Major-Projects>

# 2023 Street Improvements Project Construction Notice

**Project Summary**

The City of Elk River has awarded the 2023 Street Improvements Project to North Valley Inc.

This project includes curb and sidewalk repairs, mill & overlay, and full depth reclamation improvements on approximately 17.5 miles of streets in various locations within the City. The overall project layout can be found on the City website at the link listed below. See the back side of this notice for a project location map of your specific development area.

**Mill & Overlay**

You can anticipate the following work flow on the road segments in your area:

- 1) Any identified failed bituminous curb will be removed.
- 2) A milling machine will grind the existing pavement down at the face of curb to allow the new surface to match into the existing surface and driveways.
- 3) The contractor will sweep the existing road surface, place tack coat, and overlay with a new bituminous surface and patch in the removed bituminous curb.
- 4) Topsoil, seed, and mulch will be placed where the existing turf is disturbed.

**Project Schedule**

Work in your area is anticipated to begin the week of May 15, 2023. Once they begin work on your street, it is anticipated they will complete the work within 4 weeks.

Please note that construction schedules and operations are controlled by the Contractor and are subject to change based on weather and construction progress.


**Traffic Impacts**

During construction, the roads will be restricted, and minor delays may occur, but access will be maintained to residents.



The Contractor will place no parking signs along the project when work is planned. Please do not park on these streets when posted as your vehicle may be towed to enable the project to be completed.

Thank you for your cooperation during this construction project. If you have any questions or concerns during the project, Jason Cook or Jon Nico will be able to assist you at the phone numbers or emails listed.



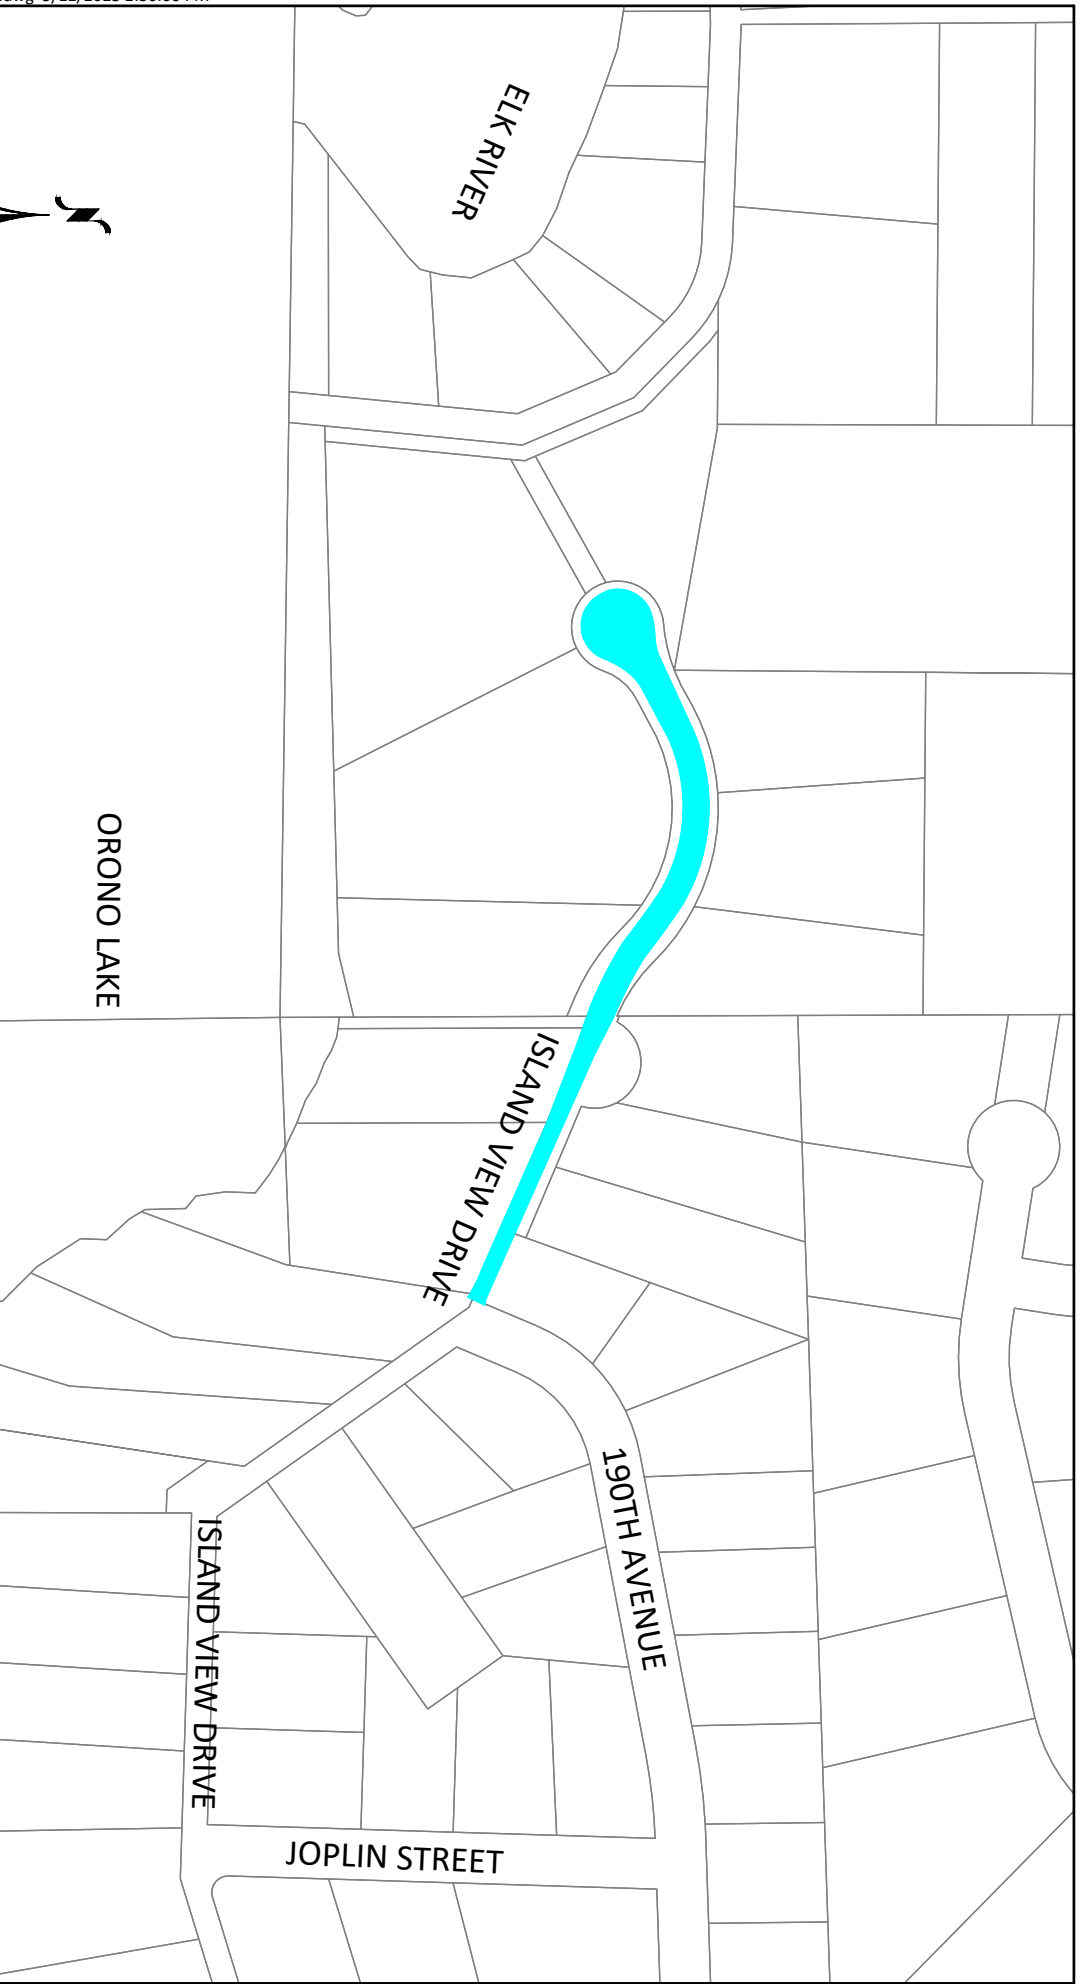

**MAP LEGEND**

-  MILL & OVERLAY PROJECT
-  LIMITS